
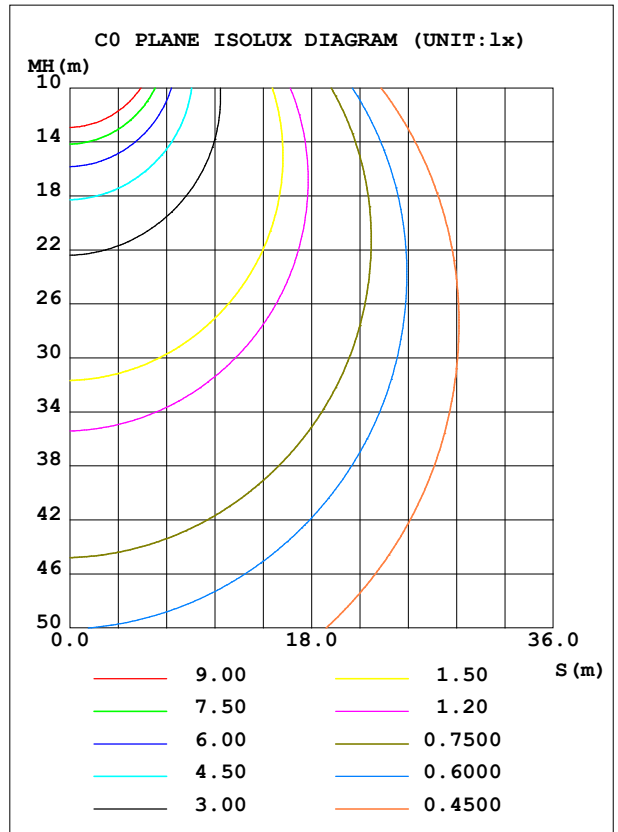


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.23V I:0.1762A P:38.099W PF:0.9817 Freq:50.00Hz Lamp Flux:5378.02x1 lm		
NAME: 三防灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	1482	S/MH (C0/180)	1.35
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.22
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	5378.0	η UP, DN (C0-180)	4.4, 45.5
NOMINAL FLUX (lm)	5378.02	CIE CLASS	DIRECT	η UP, DN (C180-360)	4.5, 45.6
LAMPS INSIDE	1	η up (%)	8.8	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	219.5	η down (%)	91.2	CIBSE SHR MAX	1.35

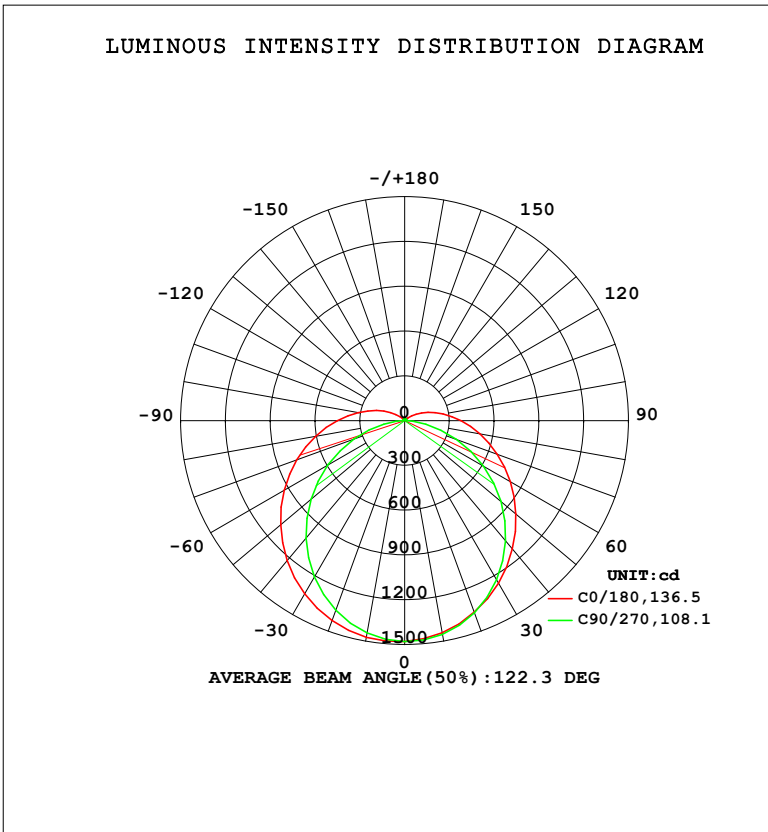

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1443	1450	1454	1463	1474	1458	1444	1445	0- 10	140.0	140.0	2.6,2.6
20	1366	1370	1369	1395	1425	1385	1351	1362	10- 20	401.3	541.3	10.1,10.1
30	1257	1244	1231	1281	1341	1268	1209	1234	20- 30	609.9	1151	21.4,21.4
40	1123	1087	1053	1132	1225	1116	1028	1075	30- 40	741.9	1893	35.2,35.2
50	973.3	907.1	842.8	957.3	1085	940.8	819.6	896.4	40- 50	786.2	2679	49.8,49.8
60	816.8	722.8	611.0	773.4	931.1	757.9	594.0	714.4	50- 60	746.9	3426	63.7,63.7
70	660.2	548.4	369.3	594.7	768.6	580.5	360.6	542.6	60- 70	640.7	4067	75.6,75.6
80	512.0	392.6	143.7	431.0	605.7	420.1	141.6	390.2	70- 80	493.9	4561	84.8,84.8
90	378.5	263.2	22.43	290.7	451.9	283.8	18.38	255.9	80- 90	342.6	4903	91.2,91.2
100	262.9	160.4	16.54	177.9	316.2	173.9	13.89	155.8	90-100	220.4	5124	95.3,95.3
110	166.8	83.01	13.00	92.30	202.3	91.09	11.88	79.91	100-110	128.4	5252	97.7,97.7
120	89.88	27.97	9.515	32.74	110.9	33.26	9.732	29.56	110-120	65.47	5318	98.9,98.9
130	32.08	12.67	10.06	15.52	41.36	15.87	10.43	11.92	120-130	27.15	5345	99.4,99.4
140	15.12	12.67	11.51	15.37	17.55	15.87	11.82	12.52	130-140	11.76	5357	99.6,99.6
150	14.95	13.08	12.97	15.56	16.97	16.05	13.44	12.85	140-150	8.940	5365	99.8,99.8
160	14.81	13.61	14.41	15.76	16.56	16.04	14.86	13.73	150-160	6.773	5372	99.9,99.9
170	14.79	14.12	15.69	15.88	16.57	15.95	16.12	14.44	160-170	4.272	5377	100,100
180	15.66	16.35	16.61	16.55	15.78	16.44	16.65	16.57	170-180	1.498	5378	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2286.2 lm

%lum = 42.5%

%lamp = 42.5%

Conical surface Flux(130deg): 3763.1 lm

%lum = 70.0%


%lamp = 70.0%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.23V I:0.1762A P:38.099W PF:0.9817 Freq:50.00Hz Lamp Flux:5378.02x1 lm		
NAME: 三防灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

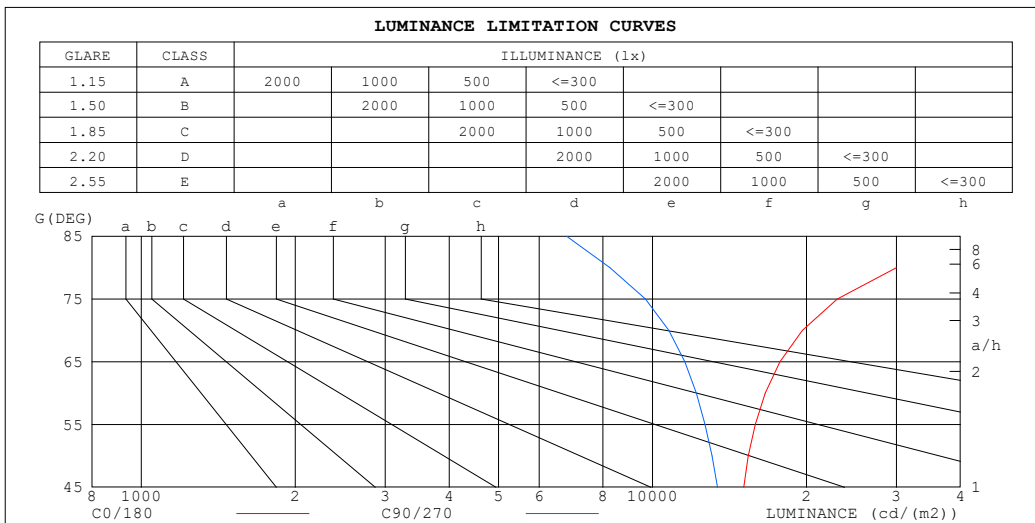

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	51704	6791
80	29983	8250
75	22960	9682
70	19628	10763
65	17759	11571
60	16612	12182
55	15880	12675
50	15397	13069
45	15080	13407


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.23V I:0.1762A P:38.099W PF:0.9817 Freq:50.00Hz Lamp Flux:5378.02x1 lm		
NAME: 三防灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.00	.00	.00	.94	.94	.94	.91
1.0	.99	.93	.89	.95	.91	.87	.89	.86	.82	.84	.81	.78	.79	.77	.74	.71
2.0	.85	.77	.71	.82	.75	.69	.77	.71	.66	.72	.68	.63	.68	.64	.61	.58
3.0	.74	.65	.58	.72	.63	.57	.67	.60	.55	.63	.57	.53	.60	.55	.51	.48
4.0	.65	.56	.49	.63	.54	.48	.59	.52	.46	.56	.50	.45	.53	.47	.43	.40
5.0	.58	.48	.41	.56	.47	.41	.53	.45	.40	.50	.44	.38	.47	.42	.37	.35
6.0	.52	.43	.36	.51	.42	.35	.48	.40	.34	.45	.39	.33	.43	.37	.32	.30
7.0	.47	.38	.32	.46	.37	.31	.43	.36	.30	.41	.34	.30	.39	.33	.29	.26
8.0	.43	.34	.28	.42	.33	.28	.40	.32	.27	.38	.31	.26	.36	.30	.26	.24
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.35	.28	.24	.33	.27	.23	.21
10.0	.36	.28	.23	.35	.28	.22	.34	.27	.22	.32	.26	.21	.31	.25	.21	.19

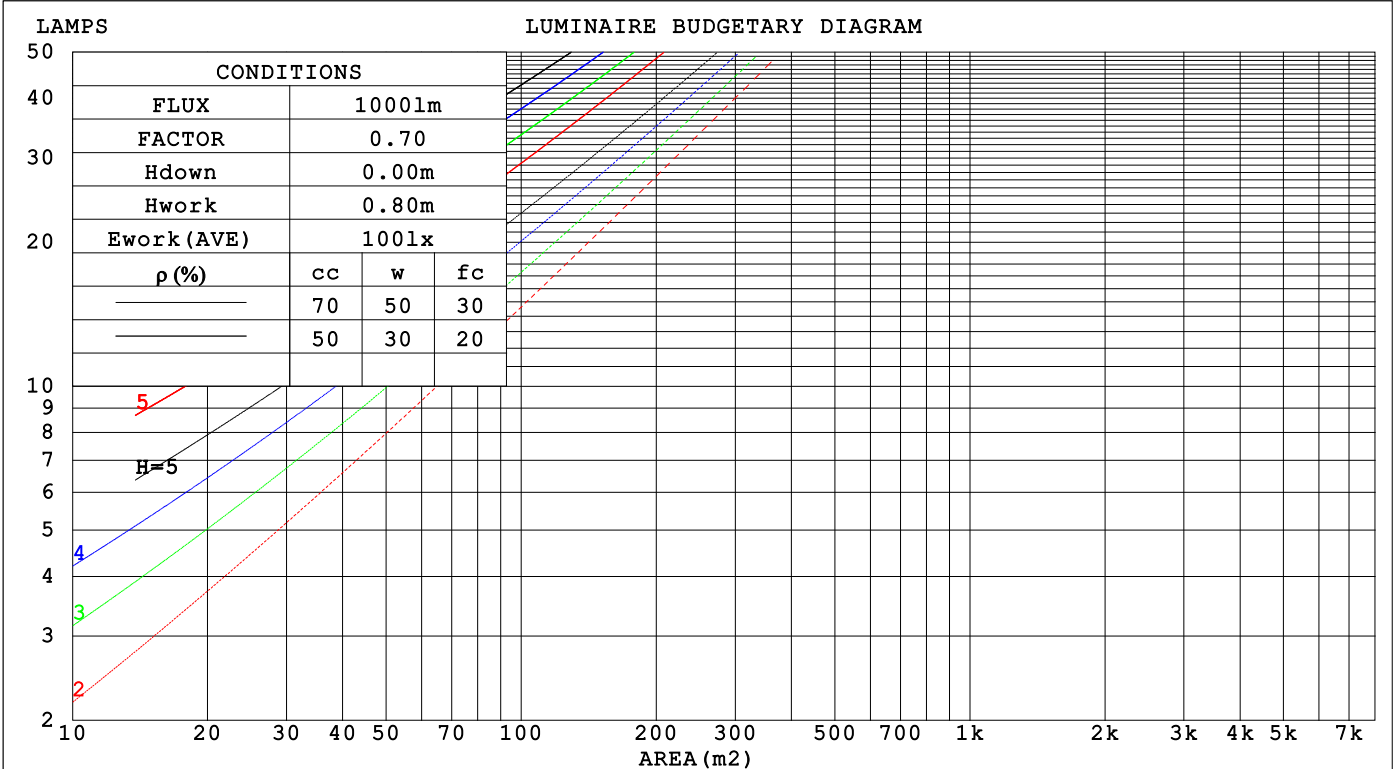

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.23V I:0.1762A P:38.099W PF:0.9817 Freq:50.00Hz Lamp Flux:5378.02x1 lm		
NAME: 三防灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.370	.210	.067	.360	.205	.065	.341	.196	.063	.324	.187	.060	.308	.179	.058	
2.0	.325	.178	.055	.316	.174	.054	.300	.167	.052	.284	.160	.050	.270	.153	.048	
3.0	.291	.155	.046	.284	.152	.046	.269	.146	.044	.255	.140	.043	.242	.134	.041	
4.0	.264	.137	.040	.257	.134	.040	.243	.129	.039	.231	.124	.037	.219	.119	.036	
5.0	.241	.123	.036	.234	.120	.035	.222	.116	.034	.211	.111	.033	.200	.107	.032	
6.0	.221	.111	.032	.215	.109	.031	.204	.105	.030	.194	.101	.030	.185	.097	.029	
7.0	.204	.101	.029	.199	.099	.028	.189	.096	.028	.180	.092	.027	.171	.089	.026	
8.0	.190	.093	.026	.185	.091	.026	.176	.088	.025	.168	.085	.024	.160	.082	.024	
9.0	.177	.086	.024	.173	.084	.024	.165	.081	.023	.157	.079	.023	.150	.076	.022	
10.0	.166	.080	.022	.162	.078	.022	.155	.076	.021	.147	.073	.021	.141	.071	.020	

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.258	.258	.258	.220	.220	.220	.150	.150	.150	.086	.086	.086	.028	.028	.028	
2.0	.245	.200	.162	.210	.172	.140	.144	.119	.098	.083	.069	.057	.027	.022	.019	
3.0	.237	.183	.140	.203	.158	.121	.140	.110	.085	.081	.064	.050	.026	.021	.016	
4.0	.229	.170	.125	.197	.147	.109	.135	.103	.077	.078	.060	.045	.025	.020	.015	
5.0	.222	.160	.115	.190	.139	.100	.131	.097	.071	.076	.057	.042	.024	.019	.014	
6.0	.214	.152	.107	.184	.132	.094	.127	.092	.066	.074	.054	.039	.024	.018	.013	
7.0	.207	.145	.102	.178	.126	.089	.123	.088	.063	.071	.052	.037	.023	.017	.012	
8.0	.200	.140	.098	.172	.121	.085	.119	.085	.061	.069	.050	.036	.022	.016	.012	
9.0	.194	.135	.095	.167	.117	.083	.116	.082	.059	.067	.049	.035	.022	.016	.012	
10.0	.188	.130	.092	.162	.113	.080	.113	.080	.057	.066	.047	.034	.021	.015	.011	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.23V I:0.1762A P:38.099W PF:0.9817 Freq:50.00Hz										
Lamp Flux:5378.02x1 lm										
NAME: 三防灯			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.:				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.2	17.7	16.6	18.0	18.4	14.9	16.4	15.3	16.8	17.1
3H	18.5	19.9	19.0	20.3	20.7	16.4	17.7	16.8	18.1	18.5
4H	19.8	21.1	20.2	21.5	21.9	16.9	18.2	17.4	18.6	19.1
6H	21.1	22.4	21.6	22.8	23.3	17.3	18.5	17.8	19.0	19.4
8H	21.9	23.1	22.4	23.5	24.0	17.4	18.6	17.9	19.0	19.5
12H	22.7	23.9	23.2	24.3	24.8	17.4	18.6	17.9	19.0	19.5
4H 2H	16.8	18.1	17.2	18.5	18.9	15.8	17.1	16.2	17.5	18.0
3H	19.3	20.5	19.8	20.9	21.4	17.5	18.6	18.0	19.1	19.6
4H	20.8	21.8	21.3	22.3	22.8	18.2	19.3	18.7	19.8	20.3
6H	22.4	23.3	22.9	23.8	24.4	18.8	19.7	19.3	20.2	20.8
8H	23.2	24.1	23.8	24.6	25.2	19.0	19.8	19.5	20.4	20.9
12H	24.2	25.0	24.8	25.6	26.2	19.1	19.9	19.6	20.4	21.0
8H 4H	21.1	22.0	21.7	22.5	23.1	19.0	19.9	19.6	20.4	21.0
6H	23.0	23.7	23.6	24.3	24.9	19.9	20.7	20.5	21.2	21.8
8H	24.1	24.7	24.7	25.3	26.0	20.3	20.9	20.9	21.5	22.2
12H	25.3	25.9	25.9	26.5	27.2	20.6	21.2	21.2	21.8	22.4
12H 4H	21.1	22.0	21.7	22.5	23.1	19.3	20.1	19.8	20.6	21.2
6H	23.1	23.8	23.7	24.4	25.0	20.3	21.0	20.9	21.6	22.2
8H	24.3	24.9	24.9	25.5	26.1	20.9	21.4	21.5	22.0	22.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 5378 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 5.8)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.23V I:0.1762A P:38.099W PF:0.9817 Freq:50.00Hz Lamp Flux:5378.02x1 lm		
NAME: 三防灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	52	40	32	51	39	32	49	39	32	25
0.80	61	49	41	60	48	41	58	47	40	33
1.00	69	57	49	68	56	48	65	57	48	40
1.25	76	64	56	74	63	55	71	61	54	46
1.50	81	70	61	79	68	61	75	66	59	50
2.00	88	78	70	86	76	69	81	73	67	57
2.50	92	83	76	90	81	74	85	78	72	61
3.00	96	87	81	93	85	79	88	82	76	65
4.00	101	93	87	97	91	85	92	86	82	70
5.00	103	97	92	100	94	89	94	90	85	73
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.23V I:0.1762A P:38.099W PF:0.9817 Freq:50.00Hz Lamp Flux:5378.02x1 lm		
NAME: 三防灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

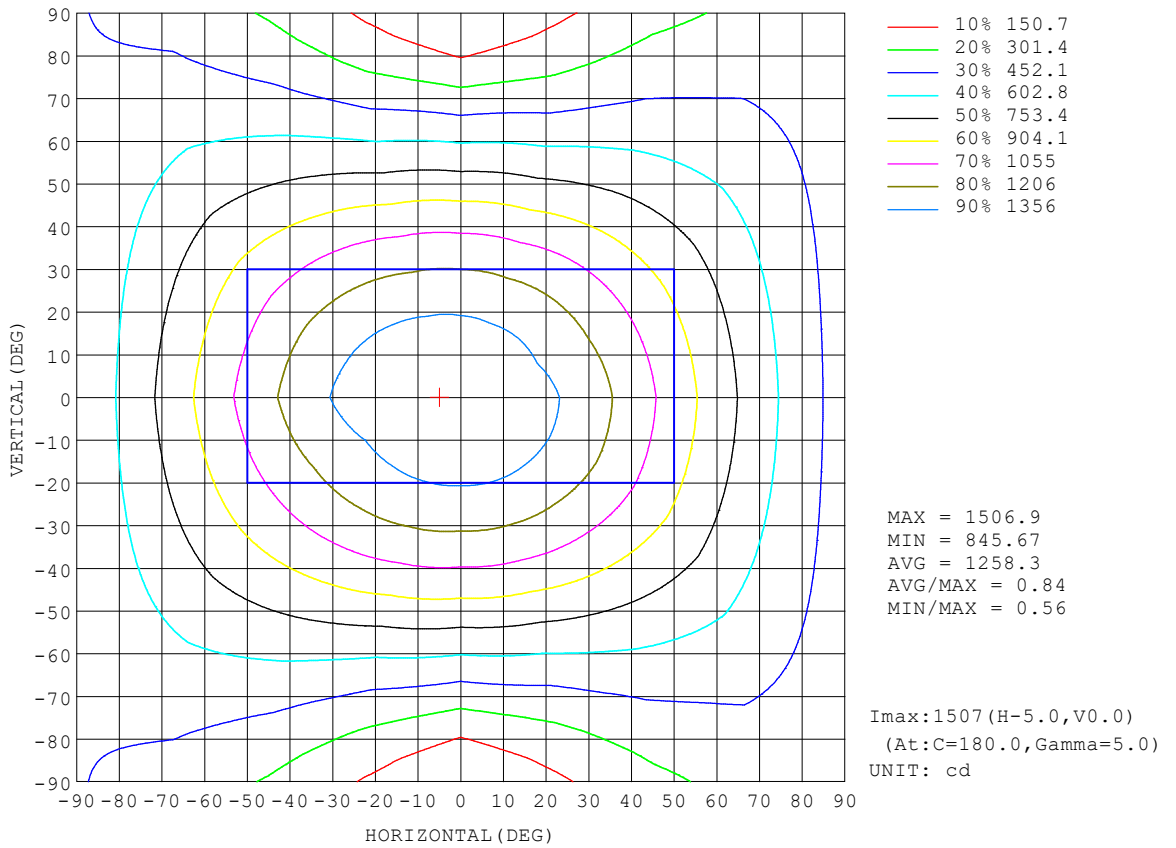


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.23V I:0.1762A P:38.099W PF:0.9817 Freq:50.00Hz Lamp Flux:5378.02x1 lm		
NAME: 三防灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

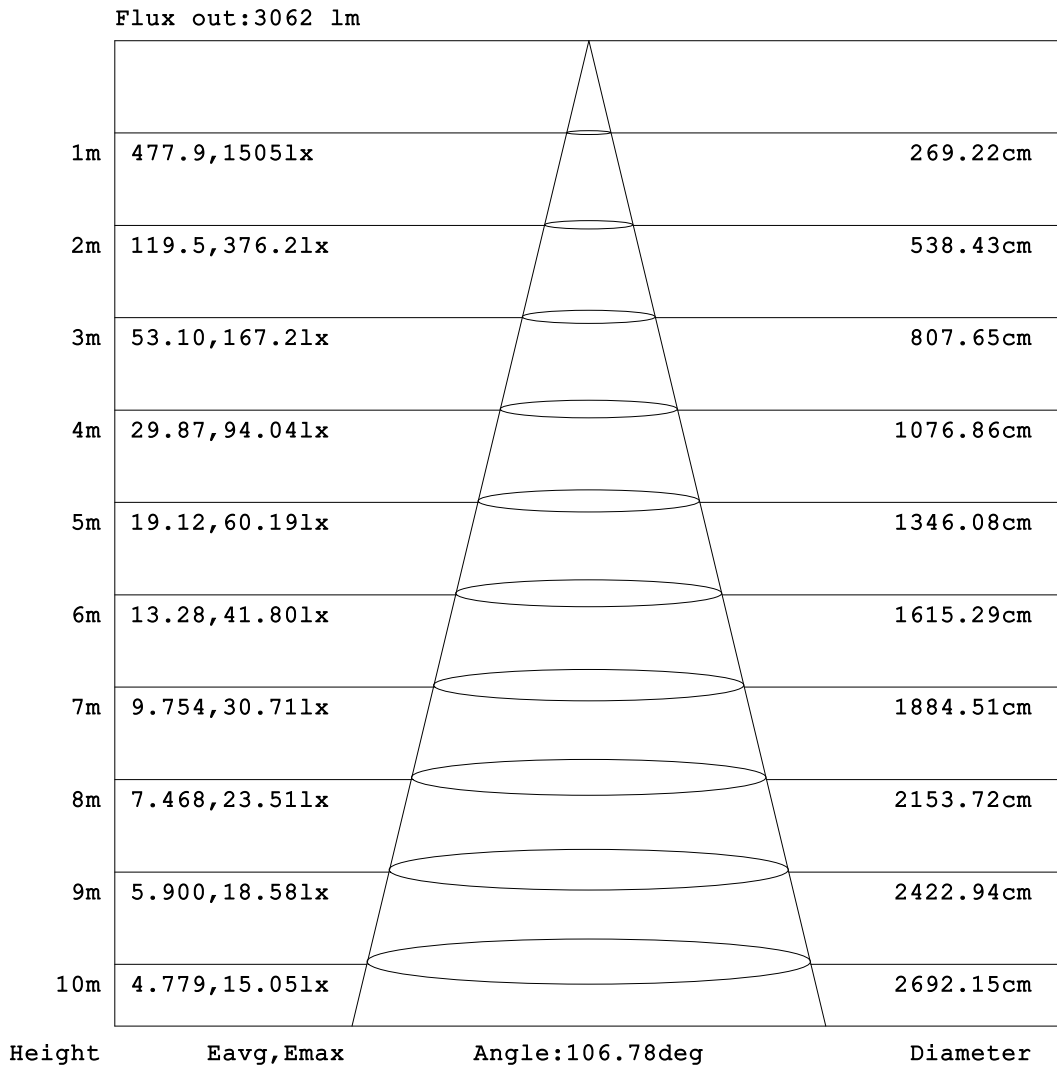


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.23V I:0.1762A P:38.099W PF:0.9817 Freq:50.00Hz Lamp Flux:5378.02x1 lm		
NAME: 三防灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

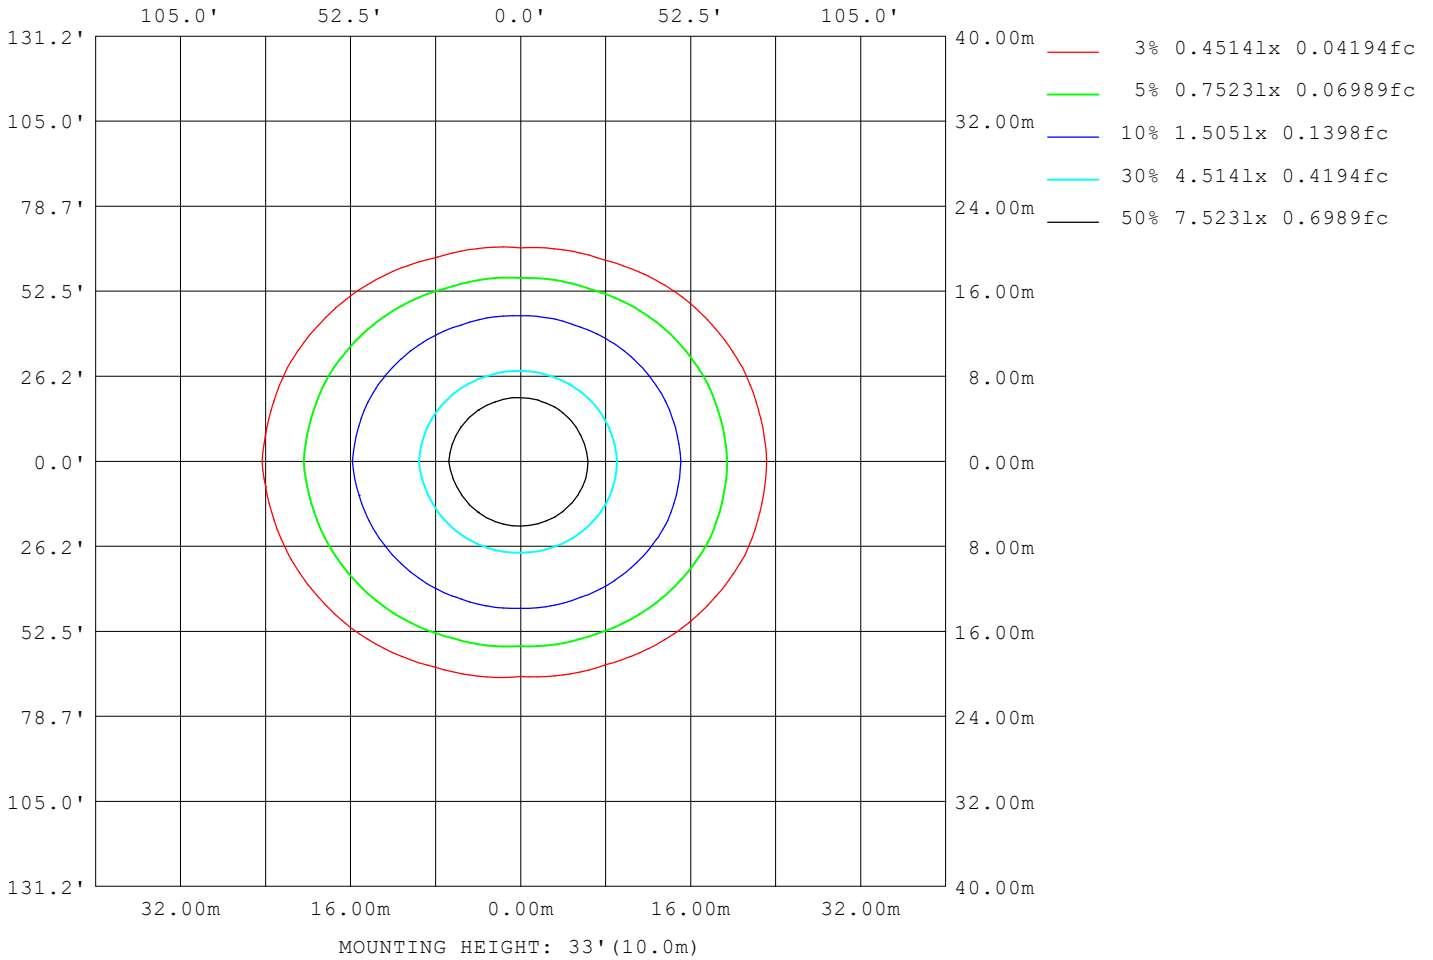

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.23V I:0.1762A P:38.099W PF:0.9817 Freq:50.00Hz Lamp Flux:5378.02x1 lm		
NAME: 三防灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	18790
L_0~180 (75) av	24549
L_0~180 (85) av	55668
L_90~270 (65) av	11448
L_90~270 (75) av	9616
L_90~270 (85) av	6754
L_45 (65) av	15445
L_45 (75) av	18731
L_45 (85) av	38870

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

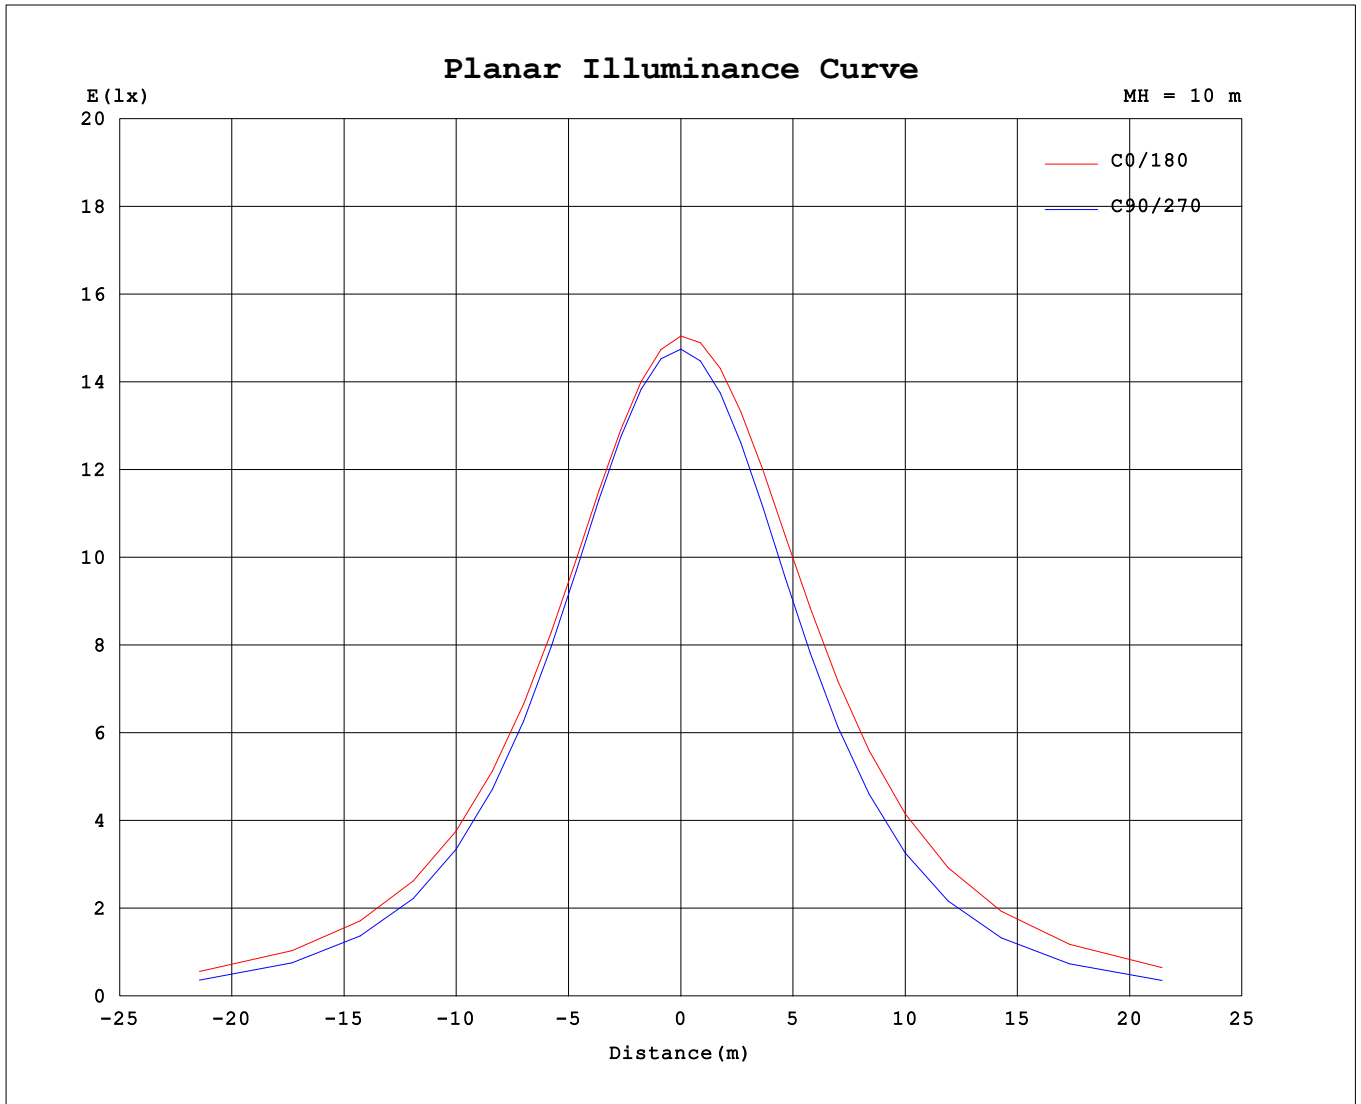

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.23V I:0.1762A P:38.099W PF:0.9817 Freq:50.00Hz Lamp Flux:5378.02x1 lm		
NAME: 三防灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480			
5	1467	1470	1471	1473	1474	1476	1478	1479	1482	1479	1475	1471	1469	1468	1469	1469			
10	1443	1448	1450	1453	1454	1458	1463	1468	1474	1466	1458	1448	1444	1443	1445	1447			
15	1409	1415	1416	1417	1418	1426	1435	1445	1454	1442	1427	1411	1405	1403	1410	1413			
20	1366	1372	1370	1369	1369	1380	1395	1412	1425	1408	1385	1361	1351	1350	1362	1369			
25	1315	1320	1312	1307	1306	1322	1343	1369	1387	1364	1331	1299	1285	1286	1303	1317			
30	1257	1260	1244	1235	1231	1252	1281	1317	1341	1312	1268	1225	1209	1211	1234	1256			
35	1193	1193	1169	1152	1146	1171	1210	1258	1287	1251	1196	1143	1122	1126	1158	1189			
40	1123	1120	1087	1060	1053	1081	1132	1190	1225	1184	1116	1052	1028	1033	1075	1116			
45	1049	1042	999	961	951	984	1047	1116	1157	1109	1031	954	926	935	988	1037			
50	973	962	907	857	843	881	957	1039	1085	1032	941	852	820	832	896	957			
55	896	881	814	750	729	774	865	959	1010	952	849	747	708	727	804	876			
60	817	799	723	642	611	666	773	877	931	869	758	641	594	622	714	795			
65	738	718	634	535	491	559	683	795	850	787	668	535	477	518	627	714			
70	660	638	548	432	369	455	595	712	769	705	581	433	361	418	543	635			
75	584	561	468	338	251	360	510	630	686	623	498	340	246	328	464	558			
80	512	488	393	254	144	273	431	551	606	545	420	256	142	247	390	486			
85	443	419	325	184	59.4	199	358	475	527	469	349	187	58.4	180	324	417			
90	379	355	263	128	22.4	140	291	403	452	398	284	129	18.4	125	256	344			
95	319	296	208	84.9	19.0	93.7	231	336	382	332	226	85.1	15.2	77.0	205	289			
100	263	241	160	53.5	16.5	58.9	178	274	316	271	174	53.0	13.9	48.2	156	235			
105	213	191	117	31.0	14.6	33.2	132	218	256	216	129	29.8	12.8	29.4	112	170			
110	167	146	83.0	15.9	13.0	17.0	92.3	168	202	167	91.1	15.6	11.9	15.9	79.9	124			
115	126	108	51.8	13.0	11.8	14.5	59.3	124	154	124	59.0	14.1	9.68	12.5	54.0	103			
120	89.9	72.4	28.0	11.8	9.52	13.4	32.7	85.2	111	85.6	33.3	13.4	9.73	11.8	29.6	73.0			
125	58.5	45.0	13.7	11.0	9.59	12.7	16.4	52.2	73.4	53.0	16.9	13.1	9.97	11.3	13.9	45.6			
130	32.1	22.5	12.7	10.7	10.1	12.5	15.5	26.1	41.4	27.0	15.9	13.0	10.4	10.8	11.9	22.8			
135	15.4	14.2	12.5	10.9	10.8	12.9	15.3	17.3	19.3	17.9	15.8	13.3	11.1	10.9	12.3	14.0			
140	15.1	14.1	12.7	11.3	11.5	13.4	15.4	16.9	17.6	17.5	15.9	13.9	11.8	11.5	12.5	13.6			
145	15.0	14.1	12.9	11.8	12.2	13.9	15.5	16.7	17.4	17.2	16.0	14.4	12.6	11.9	12.6	13.6			
150	15.0	14.1	13.1	12.3	13.0	14.2	15.6	16.5	17.0	17.0	16.0	14.7	13.4	12.5	12.8	13.6			
155	14.9	14.1	13.3	12.8	13.7	14.6	15.6	16.3	16.7	16.8	16.1	14.9	14.2	13.1	13.2	13.6			
160	14.8	14.2	13.6	13.3	14.4	15.0	15.8	16.2	16.6	16.7	16.0	15.2	14.9	13.6	13.7	13.7			
165	14.8	14.3	13.9	13.9	15.1	15.3	15.8	16.2	16.5	16.4	16.0	15.4	15.5	14.2	14.2	13.8			
170	14.8	14.4	14.1	14.7	15.7	15.7	15.9	16.3	16.6	16.2	16.0	16.0	16.1	15.0	14.4	14.0			
175	14.7	14.9	15.1	15.8	16.2	16.4	16.1	16.2	15.8	16.0	16.2	16.4	16.5	15.9	15.4	14.6			
180	15.7	16.3	16.4	16.5	16.6	16.7	16.6	16.3	15.8	16.2	16.4	16.6	16.7	16.6	16.6	16.2			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-10-19

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks: